




*Professional  
power-feeding  
unit with fixed  
speeds*

## STEFF 2068

Safety device for a safe and effective workpiece feeding on different types of traditional wood-working machines

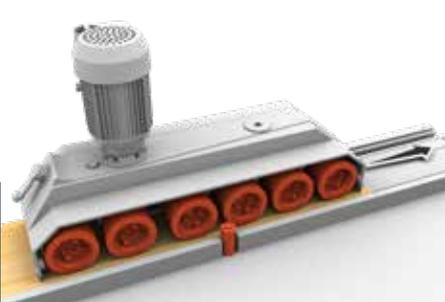

### HIGH-QUALITY LARGE-SIZE END PRODUCTS

The only and biggest 6-wheel model in the range; the ideal solution to feed long and heavy workpieces ( i.e. parts of windows and doors ). Thanks to the 3 infeed wheels and the 3 outfeed ones, even the heaviest workpieces can be transported successfully



### QUICK SET-UP WITH GEAR SHIFT

The speed selector allows a quick set-up of the 1st and the 2nd feeding rate and the quick change of the feeding direction back and forth. First 4 speeds are obtained by swapping the internal gears, while turning the gear lever You can get the additional 4 speeds easily and fast.



### PERFECT GRIP

50-Shore wheels made of patented "Feeder Grip" rubber, provide the longest durability and the highest grip on the workingpiece. 6 wheels ensure even more grip on long and heavy panels althrough the feeding process.



*Improves the safety : the operator does not have to put his hands close to the tool*



*Improves the finish quality, thanks to the constant and even feed-rate*



*Feed-rate can be easily selected to meet every specific working need*



*Easily adjustable to suit different sizes of work piece*



## STEFF 2068 SERVICE

Worldwide after-sale service.  
Real-time, on-line remote assistance through a dedicated augmented reality APP.  
Spare-parts availability for up to 10 years, shipment within 24 hrs


## DATA SHEET

N. of speeds back and forth	8
Fixed speeds	2 - 4 - 5.5 - 6.5 - 11 - 13 - 16.5 - 33 mt/min
N. of wheels	6
Wheel diameter and thickness	120 x 60 mm
Motor	1 HP / 0,75 KW RPM 1400 /2800
Wheel suspension	20 mm
Distance between wheels	○○○○○○ 133 mm - 154 mm - 133 mm - 133 mm - 133 mm
Distance between first and last wheel	○○○○○○ 686 mm
Overall dimensions and net weight of the feeding unit	853 x 240 x 490 mm 43 Kg
Overall dimensions and net weight of the stand	540 x 910 mm 35 Kg
Package dimensions and gross weight (feeding unit)	1000 x 560 x 340 mm 47 Kg
Package dimensions and gross weight ( stand)	800 x 330 x 330 mm 37 Kg



### SAFETY AS A CORE VALUE

A power-feeder improves the safety as it feeds the workpiece close to the tool, while operator's hands are kept at a distance. Its effectiveness depends on specific design and manufacturing criteria. Maggi feeders are the only ones designed and manufactured in Italy and abiding by all EU safety norms.

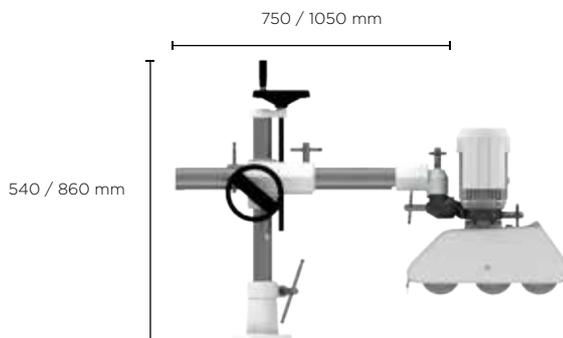

### UNIVERSAL STAND

For easy positioning and adjusting of the feeding unit on the machine tool. It is easy to fix, stable and strong : foot, cross-shaped piece, pipe, joint and collar are made of cast-iron and the two columns are made of rectified steel of considerable thickness.

**MAGGI TECHNOLOGY**  
Via delle Regioni, 299  
50052 Certaldo (Firenze) Italia

**SERVICE**  
+39 0571 635 433  
service@maggi-technology.com

**SALES**  
+39 0571 635 474  
sales@maggi-technology.com

