




*Professional  
power-feeding  
unit with fixed  
speeds*

## STEFF 2048

Safety device for a safe and effective workpiece feeding on different types of traditional wood-working machines

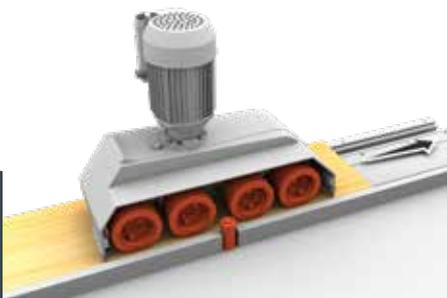

### HIGH-QUALITY END PRODUCTS

4-wheel model : the ideal solution for the feeding of wooden rods and medium and/or large-size workpieces. Thanks to the two infeed-wheels and the two outfeed ones, the workpiece is constantly and evenly fed through the working process, thus remarkably improving the quality of the end products.



### QUICK SET-UP WITH GEAR SHIFT

The speed selector allows a quick set-up of the 1st and the 2nd feeding rate and the quick change of the feeding direction back and forth. First 4 speeds are obtained by swapping the internal gears, while turning the gear lever. You can get the additional 4 speeds easily and fast.



### PERFECT GRIP

50-Shore wheels made of patented "Feeder Grip" rubber, provide the longest durability and the highest grip on the workingpiece. 4 wheels ensure even more grip on the panels, although the feeding process.



**Improves the safety** : the operator does not have to put his hands close to the tool



**Improves the finish quality**, thanks to the constant and even feed-rate



**Feed-rate can be easily selected** to meet every specific working need



**Easily adjustable** to suit different sizes of work piece



## STEFF 2048 SERVICE

Worldwide after-sale service.  
Real-time, on-line remote assistance through a dedicated augmented reality APP.  
Spare-parts availability for up to 10 years, shipment within 24 hrs


## DATA SHEET

N. of speeds back and forth	8
Fixed speeds	2 - 4 - 5.5 - 6.5 - 11 - 13 - 16.5 - 33 mt/min
N. of wheels	4
Wheel diameter and thickness	120 x 60 mm
Motor	1 HP / 0,75 KW RPM 1400 /2800
Wheel suspension	20 mm
Distance between wheels	 133 mm - 143 mm - 145 mm
Distance between first and last wheel	 421 mm
Overall dimensions and net weight of the feeding unit	615 x 220 - 490 mm 35Kg
Overall dimensions and net weight of the stand	540 x 910 mm 35 Kg
Package dimensions and gross weight (feeding unit)	670 x 570 x 330 mm 37 Kg
Package dimensions and gross weight ( stand)	800 x 330 x 330 mm 37 Kg



### SAFETY AS A CORE VALUE

A power-feeder improves the safety as it feeds the workpiece close to the tool, while operator's hands are kept at a distance. Its effectiveness depends on specific design and manufacturing criteria. Maggi feeders are the only ones designed and manufactured in Italy and abiding by all EU safety norms.

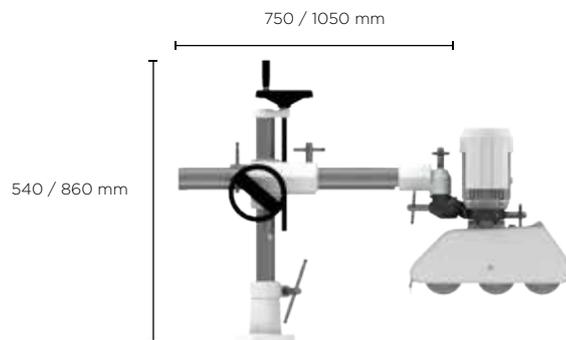

### UNIVERSAL STAND

For easy positioning and adjusting of the feeding unit on the machine tool. It is easy to fix, stable and strong : foot, cross-shaped piece, pipe, joint and collar are made of cast-iron and the two columns are made of rectified steel of considerable thickness.

**MAGGI TECHNOLOGY**  
Via delle Regioni, 299  
50052 Certaldo (Firenze) Italia

**SERVICE**  
+39 0571 635 433  
service@maggi-technology.com

**SALES**  
+39 0571 635 474  
sales@maggi-technology.com

