




*Professional
power-feeding
unit with fixed
speeds*

STEFF 2038 CI

Safety device for a safe and effective workpiece feeding on different types of traditional wood-working machines

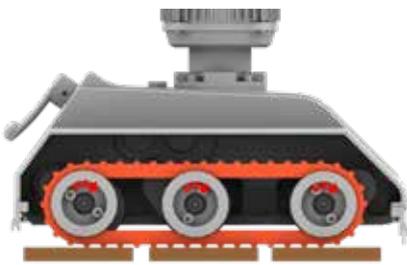

HIGH-QUALITY SMALL-SIZE END PRODUCTS

Model with belts: the ideal solution for the feeding of short and/or narrowed workpieces. Thanks to the 3 toothed belts even the smallest workpieces can be transported successfully.

QUICK SET-UP WITH GEAR SHIFT

The speed selector allows a quick set-up of the 1st and the 2nd feeding rate and the quick change of the feeding direction back and forth. First 4 speeds are obtained by swapping the internal gears, while turning the gear lever. You can get the additional 4 speeds easily and fast.

PERFECT GRIP

50-Shore toothed belts made of patented "Feeder Grip" rubber, providing the longest durability and highest grip on the workingpiece

- *Improves the safety : the operator does not have to put his hands close to the tool*
- *Improves the finish quality, thanks to the constant and even feed-rate*
- *Feed-rate can be easily selected to meet every specific working need*
- *Easily adjustable to suit different sizes of work piece*



STEFF 2038 CI SERVICE

Worldwide after-sale service.

Real-time, on-line remote assistance through a dedicated augmented reality APP.
Spare-parts availability for up to 10 years, shipment within 24 hrs


DATA SHEET

N. of speeds back and forth	8
Fixed speeds	2 - 4 - 5.5 - 6.5 - 11 - 13 - 16.5 - 33 mt/min
N. of wheels	3 (belts)
Wheel diameter and thickness	17 x 21 x 830 mm
Motor	1 HP / 0,75 KW RPM 1400 /2800
Wheel suspension	20 mm
Distance between wheels	○○○ 133 mm - 159 mm
Distance between first and last wheel	○○○ 292 mm
Overall dimensions and net weight of the feeding unit	474 x 220 x 480 mm 31 Kg
Overall dimensions and net weight of the stand	540 x 910 mm 35 Kg
Package dimensions and gross weight (feeding unit)	670 x 570 x 330 mm 33 Kg
Package dimensions and gross weight (stand)	800 x 330 x 330 mm 37 Kg



SAFETY AS A CORE VALUE

A power-feeder improves the safety as it feeds the workpiece close to the tool, while operator's hands are kept at a distance. Its effectiveness depends on specific design and manufacturing criteria. Maggi feeders are the only ones designed and manufactured in Italy and abiding by all EU safety norms.

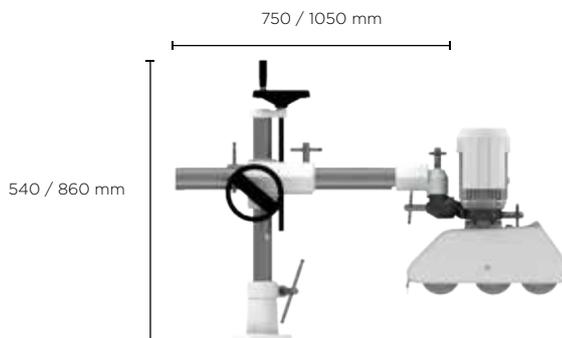

UNIVERSAL STAND

For easy positioning and adjusting of the feeding unit on the machine tool. It is easy to fix, stable and strong : foot, cross-shaped piece, pipe, joint and collar are made of cast-iron and the two columns are made of rectified steel of considerable thickness.

MAGGI TECHNOLOGY
Via delle Regioni, 299
50052 Certaldo (Firenze) Italia

SERVICE
+39 0571 635 433
service@maggi-technology.com

SALES
+39 0571 635 474
sales@maggi-technology.com

