




*Professional
power-feeding
unit with fixed
speeds*


STEFF 48 SMART

Safety device for a safe and effective
workpiece feeding on different types
of traditional wood-working machines

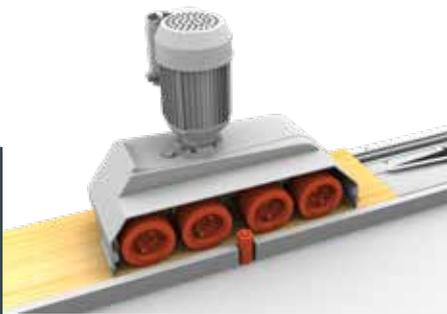

HIGH-QUALITY END PRODUCTS

4-wheel model : the ideal solution for the feeding of wooden rods and medium and/ or large-size workpieces. Thanks to the two infeed-wheels and the two outfeed ones, the workpiece is constantly and evenly fed through the working process, thus remarkably improving the quality of the end products.

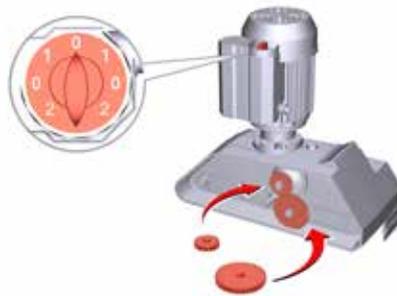

8 SPEED -"SMART" AND QUICK SET-UP

The speed selector allows a quick set-up of the 1st and the 2nd feeding rate and the quick change of the feeding direction back and forth. First 4 speeds are obtained by swapping the internal gears, while replacing them with the set of gears, included in the equipment, You get the additional 4 speeds.



PERFECT GRIP

50-Shore wheels made of patented "Feeder Grip" rubber, provide the longest durability and the highest grip on the workingpiece. 4 wheels ensure even more grip on the panels, although the feeding process.

- **Improves the safety** : the operator does not have to put his hands close to the tool
- **Improves the finish quality**, thanks to the constant and even feed-rate
- **Feed-rate can be easily selected** to meet every specific working need
- **Easily adjustable** to suit different sizes of work piece



STEFF 48 SMART SERVICE

Worldwide after-sale service.
Real-time, on-line remote assistance through a dedicated augmented reality APP.
Spare-parts availability for up to 10 years, shipment within 24 hrs


DATA SHEET

N. of speeds back and forth	8
Fixed speeds	3,5 - 4 - 6.5 - 8 - 10 - 12.5 - 20 - 25 mt/min
N. of wheels	4
Wheel diameter and thickness	120 x 60 mm
Motor	1 HP / 0,75 KW RPM 1400 /2800
Wheel suspension	20 mm
Distance between wheels	○○○○ 133 mm - 143 mm - 145 mm
Distance between first and last wheel	○○○○ 421 mm
Overall dimensions and net weight of the feeding unit	580x 280 x 485 mm 39 Kg
Overall dimensions and net weight of the stand	790 x 910 mm 35 Kg
Package dimensions and gross weight (feeding unit)	670 x 570 x 330 mm 42.5 Kg
Package dimensions and gross weight (stand)	800 x 330 x 330 mm 37 Kg



SAFETY AS A CORE VALUE

A power-feeder improves the safety as it feeds the workpiece close to the tool, while operator's hands are kept at a distance. Its effectiveness depends on specific design and manufacturing criteria. Maggi feeders are the only ones designed and manufactured in Italy and abiding by all EU safety norms.

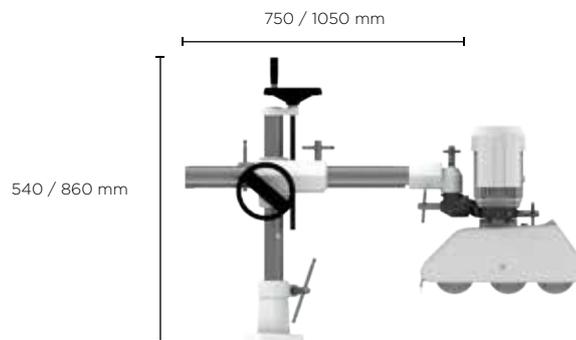

UNIVERSAL STAND

For easy positioning and adjusting of the feeding unit on the machine tool. It is easy to fix, stable and strong : foot, cross-shaped piece, pipe, joint and collar are made of cast-iron and the two columns are made of rectified steel of considerable thickness.

MAGGI TECHNOLOGY
Via delle Regioni, 299
50052 Certaldo (Firenze) Italia

SERVICE
+39 0571 635 433
service@maggi-technology.com

SALES
+39 0571 635 474
sales@maggi-technology.com

